

# Zehnder external wall grille

Technical specification for outdoor air and exhaust air connectors



## General

The Zehnder external wall grille is suitable for use in outdoor and exhaust air ducting. It is mounted on the external wall and, due to the removable front panel, is easy to clean and maintain.



External wall grille

## Benefits

- Easy to install
- Attractive visual design
- Maximum protection achieved by means of vermin protection grille and optimum fin setting for rain protection
- Easy to maintain due to ease of cleaning and inspection

## Article numbers

Description	Article numbers
External wall grille DN 125	990 430 250
External wall grille DN 150	990 430 580
External wall grille DN 160	990 430 584
External wall grille DN 180	990 430 582
External wall grille DN 200	990 430 285


Accessories	L (mm)	Ø (mm)	Article numbers
ComfoPipe Compact tube 125	1000	155/125	990 328 690
ComfoPipe Compact tube 160	1000	190/155	990 328 693
ComfoPipe Compact tube 200	1000	230/200	990 328 696
ComfoPipe Plus tube 160	1000	246/160	990 328 700
ComfoPipe Plus tube 200	1000	286/200	990 328 720

## Tender specification


The external wall grille is suitable for wall installation. It is fitted with DN 125/150/160/180/200 pipe connectors. The fins are made from stainless steel and feature a vermin protection grille with a mesh width of 10 mm. The removable front panel makes the grille easy to inspect and clean at any time. Fastening is concealed inside the housing. Wall ducts for outdoor and exhaust air must be insulated (sealed against vapour diffusion). We recommend using Zehnder ComfoPipe Compact for extract and supply air or Zehnder ComfoPipe Plus for exhaust and outdoor air as an insulated wall duct.

## Dimensional drawings


DN 125 / 150

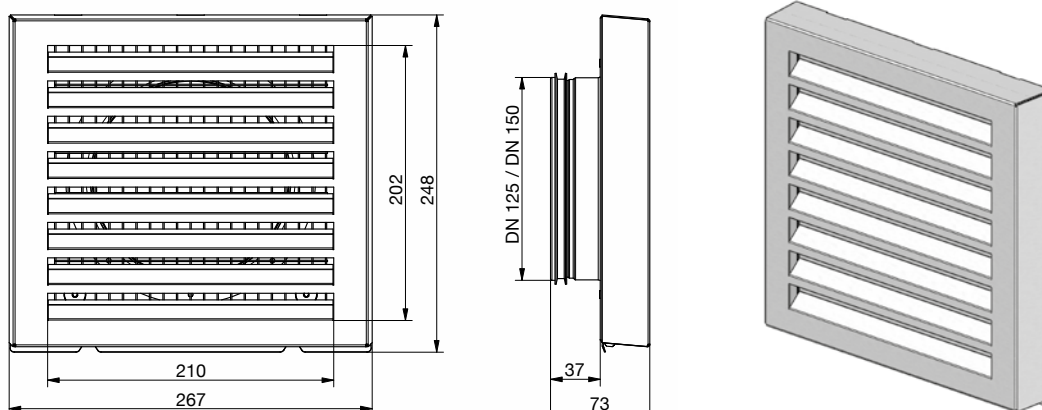

DN 160

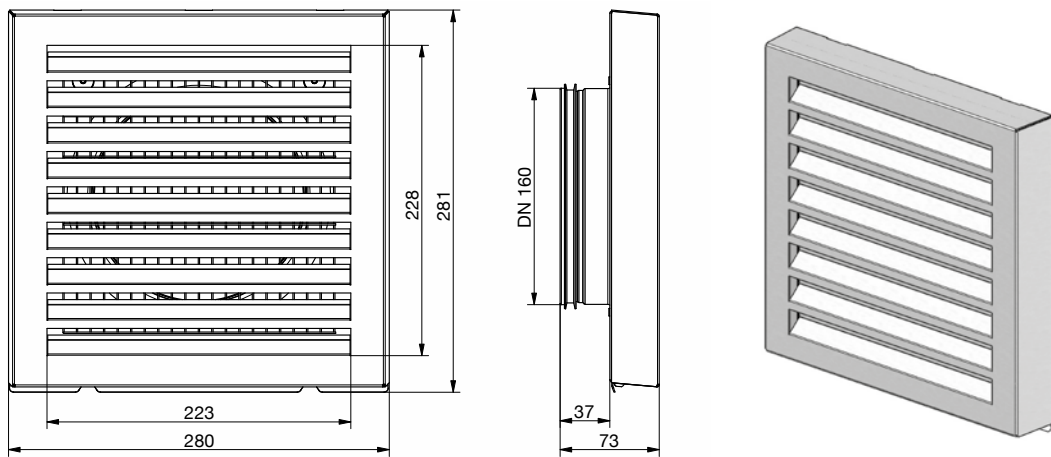

DN 180

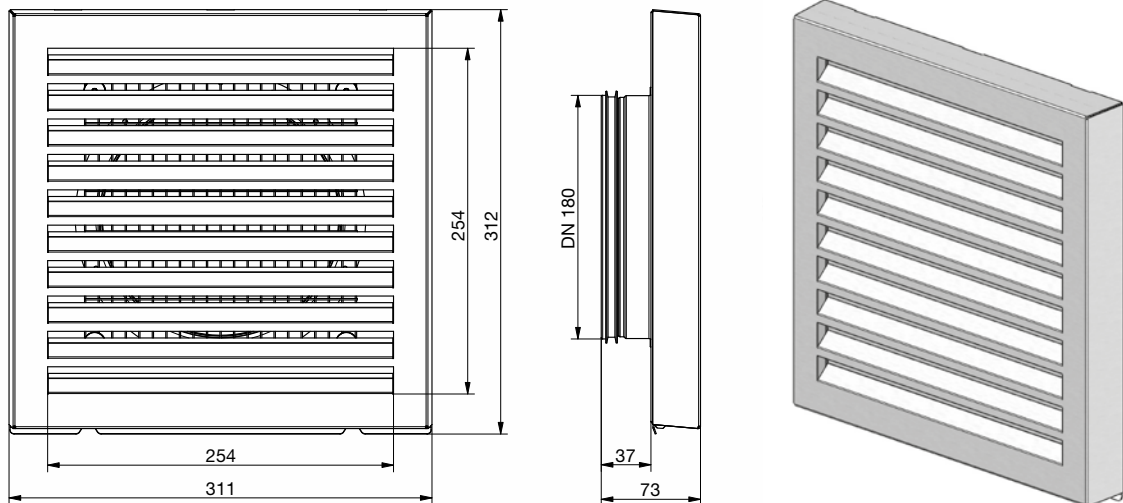

DN 200

