


# Zehnder Metropolitan

Hydronic operation

Product data sheet

always the best climate

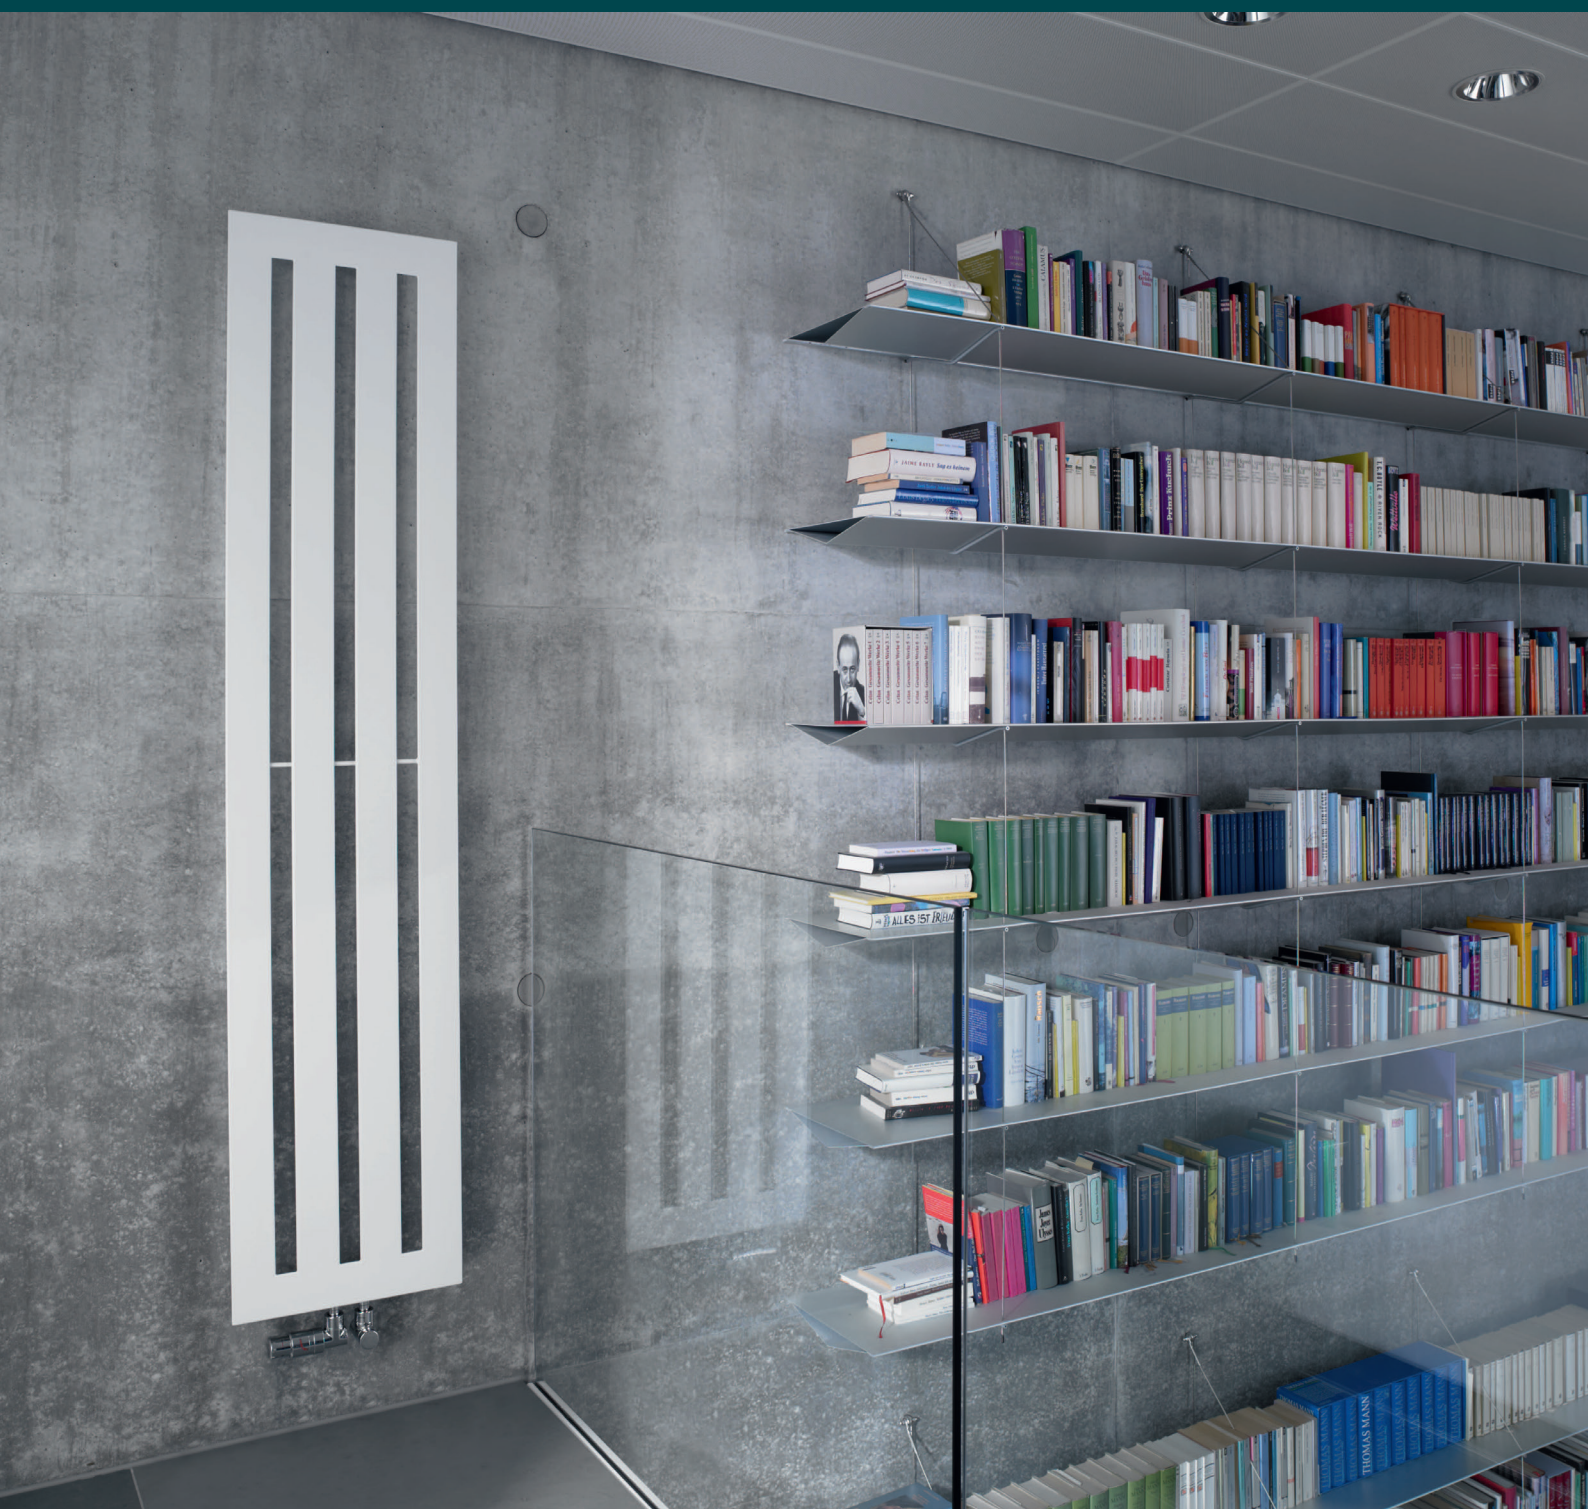


As elegant as it is refined: Zehnder Metropolitan. The innovative, flat radiator tapers back toward the wall, making it look extraordinarily light. Zehnder Metropolitan suits every setting and every style. Available in different sizes and versions and in almost all colours and finishes of the Zehnder colour chart.

### Advantages

- Smooth surface creates an elegant look
- High proportion of radiation ensures comfort
- Light and seamless design enhances any room
- The right model for any setting
- Elegantly enabled valve integration on request, which discreetly conceals connection fittings
- Innovative hybrid welding technology guarantees maximum quality and high-end design

### Model overview

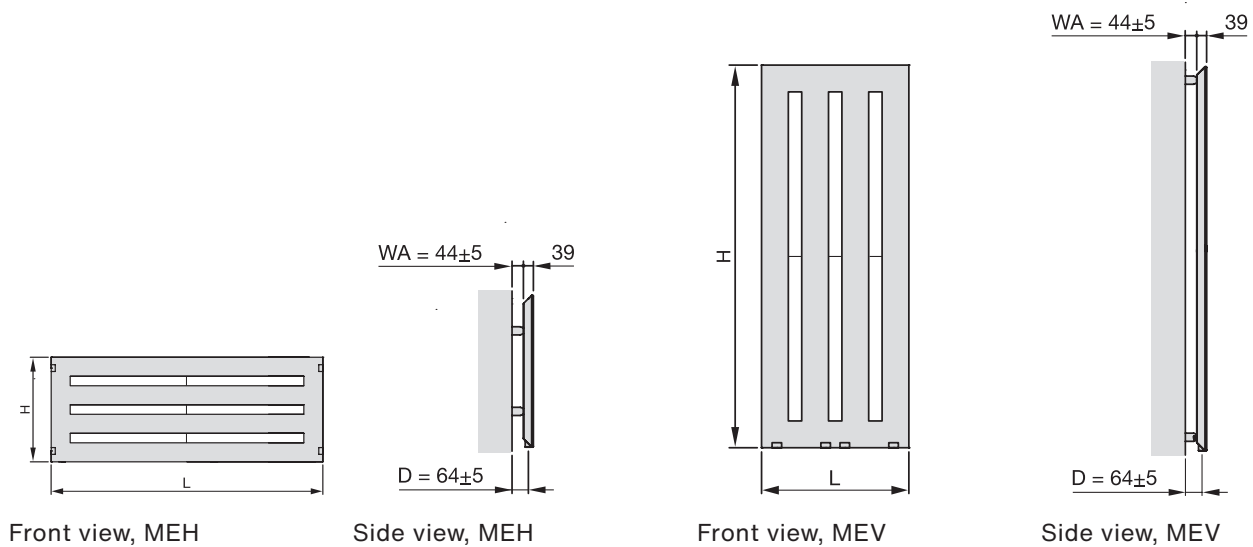

**Horizontal models**

Technical specifications per radiator

Model	H mm	L mm	T mm	Heat output			
				75/65/20 °C	70/55/24 °C	55/45/24 °C	55/45/20 °C
				Watts	Watts	Watts	Watts
MEH-080-040	805	400	39	323	229	139	165
MEH-080-050	805	500	39	387	275	166	197
MEH-080-060	805	600	39	449	319	193	229
MEH-060-090	595	900	39	447	318	191	230
MEH-070-090	700	900	39	517	368	221	266
MEH-030-140	280	1400	39	360	257	155	186
MEH-040-140	385	1400	39	474	337	201	243
MEH-050-140	490	1400	39	585	415	248	300
MEH-060-140	595	1400	39	695	495	297	358
MEH-070-140	700	1400	39	804	572	344	414
MEH-040-160	385	1600	39	542	385	230	278
MEH-050-160	490	1600	39	669	475	284	343
MEH-060-160	595	1600	39	794	565	339	409
MEH-070-160	700	1600	39	919	654	393	473
MEH-040-180	385	1800	39	610	433	259	312
MEH-050-180	490	1800	39	753	535	320	386
MEH-060-180	595	1800	39	894	636	382	460
MEH-070-180	700	1800	39	1034	736	442	532
MEH-040-200	385	2000	39	677	481	287	347
MEH-050-200	490	2000	39	836	594	355	428
MEH-060-200	595	2000	39	993	707	424	511
MEH-070-200	700	2000	39	1148	817	491	591

H = height, L = length, T = depth

75/65/20 = Nominal heat output according to EN 442

**Horizontal models**

Technical specifications per radiator

Model	H mm	L mm	T mm	Heat output			
				75/65/20 °C	70/55/24 °C	55/45/24 °C	55/45/20 °C
				Watts	Watts	Watts	Watts
MEH-120-040	1225	400	39	469	333	202	244
MEH-150-040	1540	400	39	582	419	262	308
MEH-180-040	1750	400	39	663	471	285	338
MEH-120-050	1225	500	39	563	400	242	293
MEH-150-050	1540	500	39	730	526	321	387
MEH-180-050	1750	500	39	795	564	342	405
MEH-120-060	1225	600	39	653	464	281	340
MEH-150-060	1540	600	39	871	627	383	462
MEH-180-060	1750	600	39	922	655	396	470

H = height, L = length, T = depth

75/65/20 = Nominal heat output according to EN 442

## Vertical models

Technical specifications per radiator

Model	H mm	L mm	T mm	Heat output			
				75/65/20 °C	70/55/24 °C	55/45/24 °C	55/45/20 °C
				Watts	Watts	Watts	Watts
<b>MEV-150-030</b>	1500	280	39	405	292	179	214
<b>MEV-180-030</b>	1800	280	39	490	352	214	256
<b>MEV-200-030</b>	2000	280	39	544	391	239	286
<b>MEV-150-040</b>	1500	385	39	533	384	235	281
<b>MEV-180-040</b>	1800	385	39	643	461	280	336
<b>MEV-200-040</b>	2000	385	39	714	514	313	375
<b>MEV-150-050</b>	1500	490	39	655	472	289	346
<b>MEV-180-050</b>	1800	490	39	791	568	345	413
<b>MEV-200-050</b>	2000	490	39	878	632	385	461
<b>MEV-150-060</b>	1500	595	39	773	558	341	408
<b>MEV-180-060</b>	1800	595	39	934	670	407	488
<b>MEV-200-060</b>	2000	595	39	1037	746	455	545

H = height, L = length, T = depth

75/65/20 = Nominal heat output according to EN 442