

Zehnder Subway

Hydronic operation

Product data sheet

always the best climate




Purism for walls: The pure design of Zehnder Subway is simple pleasure. The radiator impresses with a clear design aesthetic that refuses to compromise. Its distinctive square frame and delicate round tubes combine to create a designer piece that also doubles as a multiple towel rail. Available in almost any colour and finish from the Zehnder colour chart.


Advantages

- Distinctive design ideally blends with modern bathrooms
- Outside frame lends geometric look
- Generous spaces between the tubes convenient for hanging towels
- Brushed stainless steel version ensures resistance to corrosion
- Small version is ideal as radiator in guest bathrooms
- Ample spaces between tubes make cleaning easy


Model overview




Front view,
SUB-100




Front view,
SUB-130

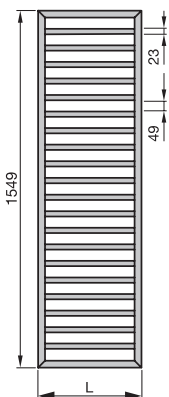

Front view,
SUB-150

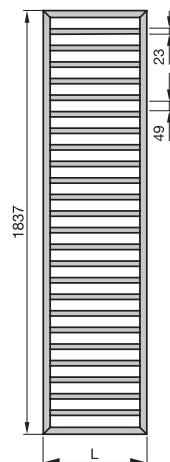

Front view,
SUB-180

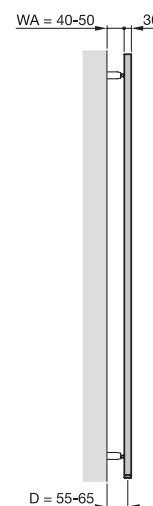

Side view,
SUB-180

Painted version

Model	H mm	L mm	Heat output				Power electric heating element Watts
			75/65/20 °C Watts	70/55/24 °C Watts	55/45/24 °C Watts	55/45/20 °C Watts	
SUB-100-045	973	450	401	289	177	212	300
SUB-130-045	1261	450	509	367	225	269	300
SUB-150-045	1549	450	615	444	272	325	600
SUB-180-045	1837	450	715	517	318	380	600
SUB-100-060	973	600	499	360	220	264	300
SUB-130-060	1261	600	639	461	282	337	600
SUB-150-060	1549	600	772	557	341	408	600
SUB-180-060	1837	600	898	649	399	477	900

Version for the guest WC

SUB-060-045	613	450	310	224	137	164	-
-------------	-----	-----	-----	-----	-----	-----	---

H = height, L = length

75/65/20 = Nominal heat output according to EN 442

Chrome-plated version

Model	H mm	L mm	Heat output				Power electric heating element Watts
			75/65/20 °C Watts	70/55/24 °C Watts	55/45/24 °C Watts	55/45/20 °C Watts	
SUBC-100-045	973	450	265	190	116	139	300
SUBC-130-045	1261	450	336	241	146	176	300
SUBC-150-045	1549	450	413	296	180	216	300
SUBC-180-045	1837	450	486	349	212	254	300
SUBC-100-060	973	600	329	237	144	173	300
SUBC-130-060	1261	600	408	294	179	214	300
SUBC-150-060	1549	600	502	361	220	264	300
SUBC-180-060	1837	600	590	425	259	310	600

Version for the guest WC

SUBC-060-045	613	450	205	147	89	107	-
--------------	-----	-----	-----	-----	----	-----	---

H = height, L = length

75/65/20 = Nominal heat output according to EN 442

Stainless steel version

Model	H mm	L mm	Heat output				Power electric heating element Watts
			75/65/20 °C Watts	70/55/24 °C Watts	55/45/24 °C Watts	55/45/20 °C Watts	
SUBI-130-045	1261	450	370	266	161	193	300
SUBI-150-045	1549	450	445	319	194	233	300
SUBI-180-045	1837	450	523	374	227	272	300
SUBI-130-060	1261	600	447	322	196	235	300
SUBI-150-060	1549	600	538	388	238	284	300
SUBI-180-060	1837	600	633	459	283	338	600

Version for the guest WC

SUBI-060-045	613	450	221	159	96	116	-
--------------	-----	-----	-----	-----	----	-----	---

H = height, L = length

75/65/20 = Nominal heat output according to EN 442

Product types and connection options

