

Zehnder Aura Bow

Hydronic operation

Product data sheet

always the best climate



Large spaces between the tubes and curved lines. Every detail of Zehnder Aura Bow is perfectly designed with modern bathrooms in mind. The decorative radiator for hot water central heating is available in white and with a high-quality chrome finish.


Advantages

- D-profile header tube creates harmonious design
- Ample spaces between tubes make cleaning easy
- Generous spaces between the tubes convenient for hanging towels
- Elegant design in high-quality chrome
- Small radiator depth ideal for narrow bathrooms

Special benefits for hot water operation

- Flexible installation through right and left connection options
- Available with Zehnder Vario connection fitting for an unobtrusive and elegantly concealed connection system
- Flexible installation due to 50mm centre connections

Model overview

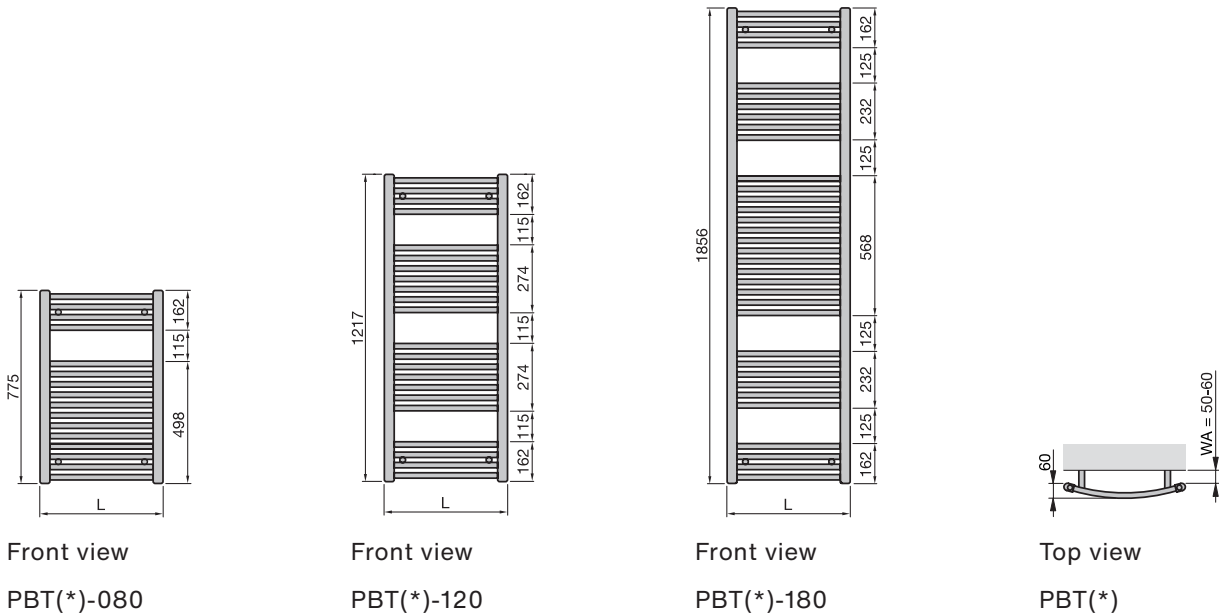

Chrome-plated version

Model	H mm	L mm	Heat output				Power electric heating element Watts
			75/65/20 °C Watts	70/55/24 °C Watts	55/45/24 °C Watts	55/45/20 °C Watts	

Connection from bottom

PBTCN-080-050	775	494	229	164	99	119	-
PBTCN-120-050	1217	494	331	236	142	171	300
PBTCN-080-060	775	595	274	198	121	145	-
PBTCN-120-060	1217	595	388	278	168	202	300
PBTCN-150-060	1469	595	481	344	208	250	300

H = height, L = length

75/65/20 = Nominal heat output according to EN 442

Painted version

Model	H mm	L mm	Heat output				Power electric heating element Watts
			75/65/20 °C Watts	70/55/24 °C Watts	55/45/24 °C Watts	55/45/20 °C Watts	

Connection from bottom

PBTN-080-050	775	496	357	261	163	193	300
PBTN-120-050	1217	496	511	371	229	273	300
PBTN-180-050	1856	496	786	568	349	417	600
PBTN-080-060	775	595	420	307	192	228	300
PBTN-120-060	1217	595	595	431	266	317	600

H = height, L = length

75/65/20 = Nominal heat output according to EN 442